


RANSOMWARE

WAYS TO SPREAD

SELF-PROPAGATION

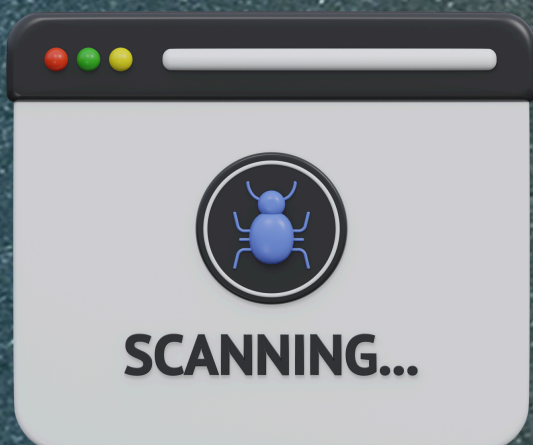

Some strains can spread automatically by exploiting certain features and services of a computer's operating system.

MANUALLY

It involves hackers who can break into systems via vulnerabilities and then manually install ransomware.

10100011
01001110
00110110
10111001



INACTIVE USER

It occurs when users unknowingly get infected by clicking on links in spam or phishing emails, visiting websites that have been hacked.



AUTOMATIC DOWNLOADS

Cyber attackers make use of drive-by downloads by hosting malicious content on your own website or injecting it onto others by exploiting known vulnerabilities.

